




MIRROR DEMISTING PANEL

No more misty mirrors!

Mirror demisting panel is the safe and simple answer to steamed-up mirrors. It is double insulated and designed for use in wet areas such as bathrooms, shower rooms, etc. The panel is only 0.4mm thick. It is simply installed by peeling off the self-adhesive backing and sticking it directly onto the back of the mirror. To save energy, the panel wires are connected to the lighting system and switched on only when required. This prevents the heater will be switched on for a long time and prevents overheating. The mirror demisting panel is for demisting the mirror, it is not a bathroom heater.

TECHNICAL DATA

Sizes	40x58 cm. / 65 Watt & 35 Ø cm. / 50 Watts
Voltage	230 V
Thickness	0.4mm
Cable length	ca. 80 cm.
Standard	IP34 Class 2
Approval	CE
Temperatures	Based on capacity average temperature 50 degrees Celsius; if the element has not been installed according to above instructions maximum temperature may be exceeded, temperatures may also increase depending on the mirror make up and construction.

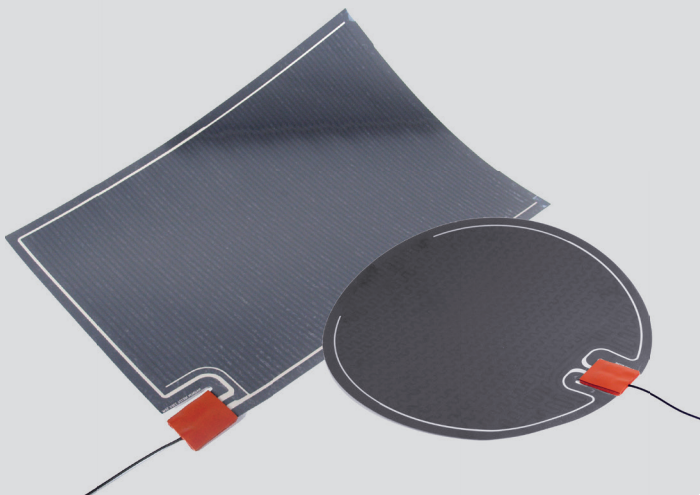

INSTALLATION MANUAL

Mirror demisting panels designed for glass mirrors only. Ensure the mirror is larger than the mirror demisting panel. Carefully peel off self-adhesive backing from the mirror demisting panels and place directly onto the back of the mirror making sure there are no creases or bubbles. Allow for heat expansion when mounting the mirror i.e. do not butt tiles hard against the mirror allow a silicone expansion gap.

- Do not fit mirror onto or near metallic surfaces, i.e. aluminium, stainless steel etc.
- Corner brackets must have clearance to allow for expansion.
- If fitting mirror to wall using adhesive, the adhesive should be placed around the edge of the mirror (Minimum 40 mm gap between panel and edge of mirror).
- Do not put adhesive onto the mirror demisting panel.
- Do not cut, drill or weaken the mirror structure in any way after manufacture.
- Do not cut or alter the mirror de-misting panel or overlap panels.
- Wiring should be carried out in accordance with IEE regulations.
- Please always consult your mirror manufacturer to check the compatibility and installation method for using a heated element pad with their products.
- Please always consult your adhesive manufacturer to check the compatibility and installation method for using a heated element pad with their products.
- This element is designed for flat wall mounted mirrors only and not for curved mirrors.

NOTE: All electrical connections should be undertaken by a qualified electrician. An MCB or RCCB must be used as applicable.

Klima technical helpline - 01887822020

Klima Underfloor Heating
Karelia House, Keltneyburn
By Aberfeldy, PH15 2LS
T 01887 822020
E technical@klima.co.uk
W www.klima.co.uk

EU Manufacturer
MAGNUM Heating Group
Stevinweg 8
4691 SM Tholen
THE NETHERLANDS



UK Importer
MAGNUM Heating Ltd.
Karelia House - Comrie Bridge
Keltneyburn - By Aberfeldy
PH15 2LS
UNITED KINGDOM
VAT / EORI Number:GB693986263